

AQUAMURA

Thank you for purchasing Aquamura

PANEL SPECIFICATION

Substrate: 9mm Birch Plywood
Facings: High Pressure Decorative Laminate
Reverse: Balancer Laminate

Dimensions

Length: 2400mm
Thickness: 11mm
Effective Width: as specified in brochure

1. PREPARATION

Wherever possible, existing wall coverings should be removed.
Aquamura can be fixed directly over hard surfaces e.g. tiles, using method 4(b)
Panels must be conditioned for at least 48 hours at the normal temperature for that room to minimise movement later.

2. BATTENING (if necessary)

Accurate fixing of 25 x 50mm timber battens will facilitate alignment of panel joints.

- i) Fix horizontal battens at maximum 600mm centres around walls
- ii) Should walls be uneven when aligning battens, packing will be required
- iii) In positions where heavy items may be fixed e.g. cabinets, cubicle-partitions, urinals etc. extra battens must be used
- iv) Vertical battens may be necessary around windows, doors and corners

3. CUTTING

When using an electric saw place panels face down
If using a hand saw place panels face up


4. DIRECT FIXING

- (a) By small gauge countersunk screws at grooved edge
- (b) Screwed and or grip-fix type adhesive

FIXING AQUAMURA

Start at one corner working in both directions. The last panel on each wall can be trimmed to size with corner extrusion fitted and glued to battens or wall.

1. Place first panel to wall (with tongue removed) into corner extrusion.
2. Fix panel through back shoulder of groove with 25mm panel pins, or ¼" No. 6 countersunk woodscrews.
3. Continue to work around walls.

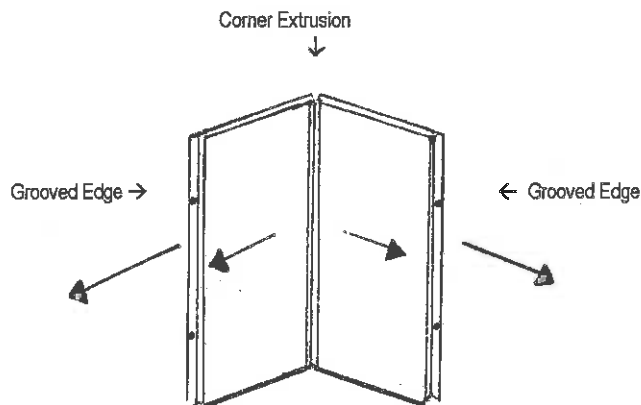

***IN WET APPLICATIONS (e.g. SHOWERS/BATHROOMS) ALL JOINTS AND EXPOSED EDGES *MUST* BE SEALED WITH APPROVED SEALANT. PANELS MUST BE FITTED TO REST ON SHOWER TRAY EMBEDDED IN SILICON. SILICON MUST BE REGULARLY INSPECTED AND IF SEAL IS FOUND TO HAVE BROKEN DOWN, THE SILICON BEAD SHOULD BE REMOVED AND RE-APPLIED AS SOON AS IS POSSIBLE. PANELS MAY DETERIORATE IF LEFT SATURATED FOR A PROLONGED PERIOD OF TIME, AND THE WARRANTY VOIDED.**

*****If supplied with film coating, this should be left on whilst fitting the panel. THIS MUST THEN BE REMOVED AND THE PANEL INSPECTED PRIOR TO FIXING THE NEXT PANEL*****

If any panel is found to be defective in any way, we shall gladly replace it.
However, claims for fixing of subsequent panels will not be entertained if this fitting inspection is not carried out.

For further assistance, contact the Aquamura Helpline Tel: 07852 77 00 22

www.aquamura.co.uk